

Directions for Use

Insert the filtration cartridge into the housing as described in the user's manual which accompanied the refrigerator at the time of sale. To condition the filter system, run several glasses of water through the water dispenser before using this system.

Operating Specifications

Maximum operating temperature 38° C


Minimum operating temperature 1° C

Max/Min. working pressure 125 PSIG / 30 PSIG

Rated capacity 6 Months or 757 Litres, whichever comes first.

Precautionary Statement

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after use of the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

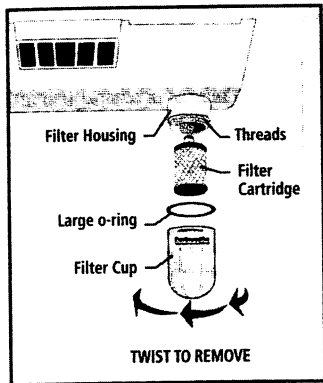

- Reduces Cysts by 99.99%
- Reduces Particulates (Class I) by 99.80%
- Reduces Turbidity by 99.70%
- Reduces Lead by 99.30%
- Reduces Chlorine (Class I) by 97.80%
- Reduces 2, 4-D (common Herbicide) by 94.20%, and Atrazine by 94.90%
- Reduces Toxaphene (common Pesticide) by 87.50%

Instructions d'utilisation

Insérez la cartouche filtrante dans le boîtier tel que décrit dans le guide de l'utilisateur qui accompagnait le réfrigérateur au moment de la vente. Pour conditionner le système de filtration, laissez couler plusieurs verres d'eau avant d'utiliser ce système.

Caractéristiques de fonctionnement

Température maximale de fonctionnement38°C


Température minimale de fonctionnement1°C

Pression max./min. de fonctionnement125 PSIG/30 PSIG

Capacité nominale 6 mois ou 757 litres, selon la première éventualité

Mise en garde

Ne pas utiliser si l'eau est insalubre sur le plan microbiologique ou si elle est d'une qualité inconnue. Il faut bien désinfecter l'eau avant ou après l'utilisation du système. Les systèmes homologués pour la réduction des kystes peuvent être utilisés avec une eau désinfectée pouvant contenir des kystes filtrables.

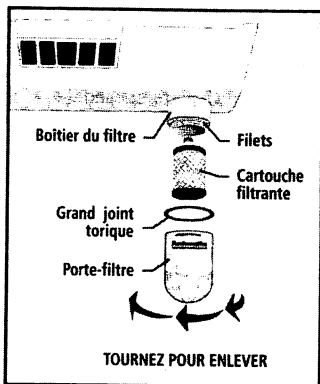

- Réduit les kystes de 99,99 %
- Réduit les particules (classe I) de 99,80 %
- Réduit la turbidité de 99,70 %
- Réduit le plomb de 99,30 %
- Réduit le chlore (classe I) de 97,80 %
- Réduit le 2,4-D, un herbicide courant, de 94,2 % et l'atrazine de 94,9 %
- Réduit le toxaphène, un pesticide courant, de 87,5 %